

WYLER

wylerCONNECT ...

... me please



The Interface

Version 2020-1

WYLER AG
Inclination measuring systems

Im Holderli 13
CH - 8405 Winterthur (Switzerland)
+41 (0) 52 233 66 66

+41(0) 52 233 20 53
wyler@wylerag.com
www.wylerag.com



wylerCONNECT

Clear and brief...

Based on the WINDOWS 10® operating system, the **wylerCONNECT** interface connects WYLER software with WYLER instruments.

wylerCONNECT contains:

- **Bluetooth and Bluetooth Low Energy (BLE) modules** to ensure direct wireless communication with the BlueSYSTEM family like BlueLEVEL, BlueLEVEL-2D, BlueCLINO series and also with the Clinotronic S.
- **IR receiver** to trigger measurements via **wylerTRIGGER** (standard equipment)
- **Integrated license functions** to manage software licenses
- **RS-485/232** interface allows connection of ZEROTRONIC or ZEROMATIC sensors via cable

Configuration




... more than an interface

wylerCONNECT

Good news:

1. Save money, be clever!

- ➔ In applications which do not require a remote display - e.g. the measurement of granite plates - the wylerCONNECT, together with BlueLEVELS and the software wylerELEMENTS, offers the most cost-effective solution!

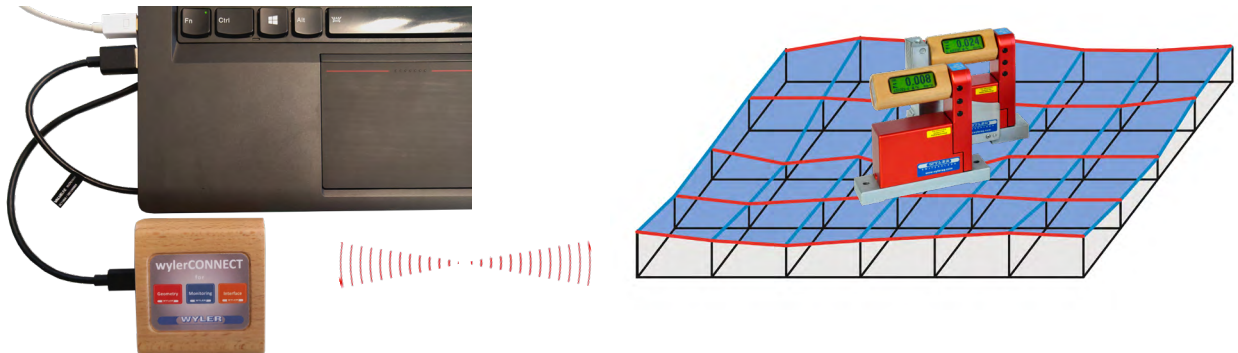

2. These devices are also supported:

- ➔ Minilevel NT, BlueLEVEL Basic with Y-Extension



3. License control with wylerCONNECT:

- ➔ Check out **wylerSOFT Info-Center** for **wylerLICENSE**



... more than an interface

wylerCONNECT

Compatibility

| Instruments | Wireless | „Cable-based“ |
|--|----------|-------------------|
| BlueLEVEL, BlueLEVEL Basic | √ | √ |
| BlueLEVEL-2D | √ | √ |
| BlueCLINO, BlueCLINO, BlueCLINO High Precision | √ | √ |
| Clinotronic S | √ | |
| ZEROTRONIC 3 via MultiTC | | √ |
| ZEROTRONIC C via MultiTC | | √ |
| ZEROMATIC (with extra 24V power supply) | | √ |
| Discontinued: | | |
| Climo 2000 for wylerINSERT and wylerEXPLORER only | | Cable RS232-RS485 |
| Minilevel NT , BlueLEVEL Basic, max 2 with Y-Extension | | Y-Extension |

| Software | |
|--|---|
| wylerSPEC/ wylerPROFESSIONAL / wylerELEMENTS | √ |
| wylerINSERT | √ |
| wylerEXPLORER | √ |

| Scope of delivery |
|----------------------------------|
| wylerCONNECT Set includes |
| wylerCONNECT |
| Cable USB-A/C |
| wylerTRIGGER |
| Quick reference |
| Transport case |
| OPTIONS: |
| Y-Extension RS485 |
| Cable RS232-RS485 |

| Technical specifications | |
|--------------------------|---|
| Supply | USB-C, 5V |
| Max power consumption | 500mA |
| Connectivity | 1 x USB-C / 3.0 1 x RS-485 Binder |
| Wireless Communication | Bluetooth Bluetooth Low Energy (BLE) |
| Dimensions / Weight | 80x70x50mm / 170g |
| IP | 64 |
| Storage temperature | -20 ... 60°C |
| Operating temperature | 0 ... 40°C |



www.wylerag.com



Videos WYLER AG
Quality - Innovation - Service



Facebook Channel WYLER AG
www.facebook.com/wylerSWISS

Inclination measuring systems. Precise. Since 1928.